INTERCONNECT WIRING DIAGRAM (CC412)

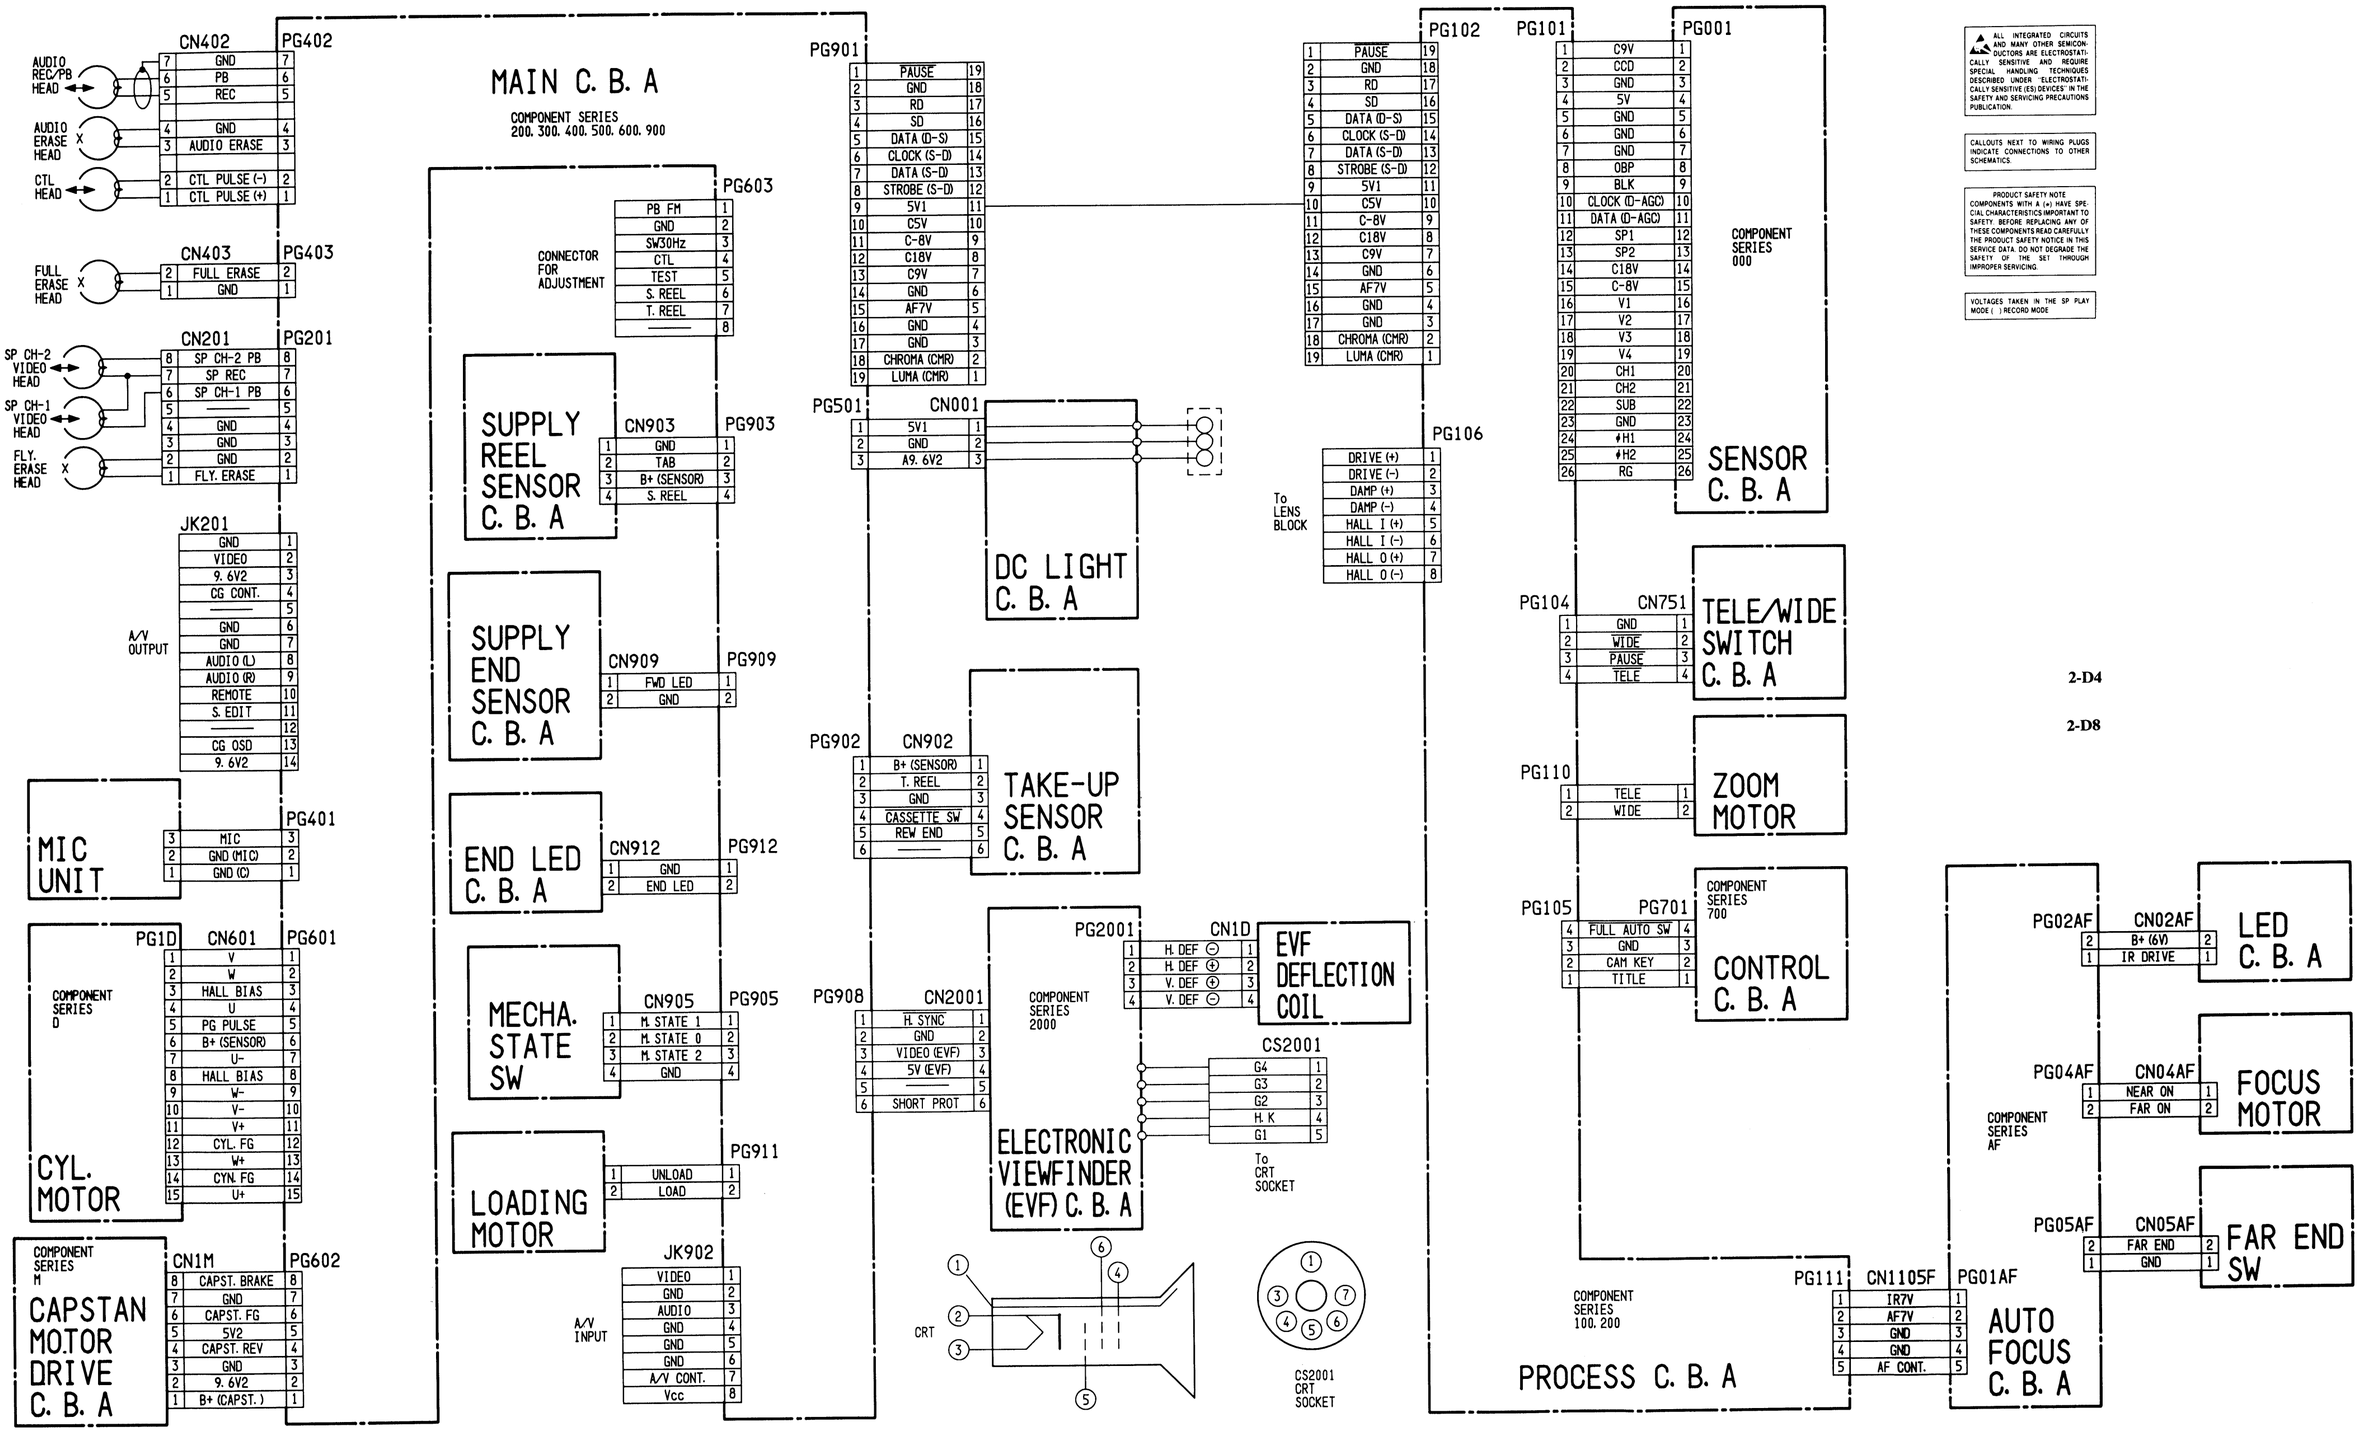

ALL INTEGRATED CIRCUITS AND MANY OTHER SEMICONDUCTORS ARE ELECTROSTATICALLY SENSITIVE AND REQUIRE SPECIAL HANDLING TECHNIQUES DESCRIBED UNDER 'ELECTROSTATICALLY SENSITIVE (ES) DEVICES' IN THE SAFETY AND SERVICING PRECAUTIONS PUBLICATION.

CALLOUTS NEXT TO WIRING PLUGS INDICATE CONNECTIONS TO OTHER SCHEMATICS.

PRODUCT SAFETY NOTE
COMPONENTS WITH A (∗) HAVE SPECIAL CHARACTERISTICS IMPORTANT TO SAFETY. BEFORE REPLACING ANY OF THESE COMPONENTS READ CAREFULLY THE PRODUCT SAFETY NOTICE IN THIS SERVICE DATA. DO NOT DEGRADE THE SAFETY OF THE SET THROUGH IMPROPER SERVICING.

VOLTAGES TAKEN IN THE SP PLAY MODE ( ) RECORD MODE

2-D4
2-D8
2-D5 2-D6 2-D7